

Feel Safe, Be Secure...
Wherever You Are

Metro[®]
LOOKING FOR SAFETY



- Industrial Safety Belts & Harness
- Industrial Safety Helmets
- Road Safety Equipments
- Industrial Safety Nets
- Industrial Safety Shoes & Gumboots



IS : 2925
IS : 3521
IS : 4151



Features of *Metro* Full Body Harness

Id Plate: Dorsal Webbing Holding Cross Plate Maintains The D-Ring In Place Even After A Fall.

Automatic Buckles: Extremely easy to use with single-hand adjustment.

Stitching Pattern: Unique aesthetic stitch pattern for enhanced stitching strength with smart styling.

Thigh Straps: The distinctively placed fully padded straps with automatic buckles allows easy adjustment. The Knitted mesh net used in the pads maintains proper air circulation.

Shoulder Straps: Fully padded Shoulder straps with knitted mesh pads for better comfort and air circulation.

Metal Components: All hardware used are black powder coated to provide the highest degree of corrosion protection packed with high aesthetic appeal.

Work Positioning Belt: With knitted mesh pads for extra comfort. The belt is provided with holding loops for attaching tool bags etc.

Lateral D-Rings: Specially designed to stand out, enabling easy attachment to the work positioning lanyard.



MODEL NO. SB 1056

FULL BODY HARNESS

IS 3521 :1999



FULL BODY HARNESS: FOR DESCENT (CLASS D) MODEL NO. SB 1014

- 1 sternal D- Ring at the front for descent from height. Adjustable a Dorsal D-Ring for Fall Arrest.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to IS 3521:1999

FULL BODY HARNESS: FOR FALL ARREST (CLASS A) MODEL NO. SB 1016

- A Dorsal D-Ring for Fall Arrest.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to IS 3521:1999



FULL BODY HARNESS: FOR POSITIONING (CLASS P) MODEL NO. SB 1017

- A Dorsal D-Ring for Fall Arrest. 2 Lateral D-Ring at the best level on each side, for positing the worker.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to IS 3521:1999

FULL BODY HARNESS: FOR TOWER CLIMBING (CLASS L) MODEL NO. SB 1018

- A Dorsal D-Ring for Fall Arrest. 2 Chest attachment D-Ring for tower climbing.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to IS 3521:1999



FULL BODY HARNESS: FOR ENTRY & EXIT (CLASSE) MODEL NO. SB 1019

- A Dorsal D-Ring for Fall Arrest. 2 sliding D-Ring 1 on each soldier strap for easy entry & exit in confined spaces.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to IS 3521:1999

Metro Introduces Special- Purpose Harnesses Designed For Use In The Most Challenging Environment.

EN 361:2002

FULL BODY HARNESS
MODEL NO. SB 1011



- A Dorsal D-Ring for Fall Arrest.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to EN 361:2002

FULL BODY HARNESS
MODEL NO. SB 1012



- A Dorsal D-Ring for Fall Arrest. 2 chest attachment textile loops.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to EN 361:2002

FULL BODY HARNESS
MODEL NO. SB 1021



- A Dorsal D-Ring for Fall Arrest.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable shoulder and chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to EN 361:2002

FULL BODY HARNESS
MODEL NO. SB 1022



- A Dorsal D-Ring for Fall Arrest. 2 chest attachment textile loops.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable shoulder and chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to EN 361:2002

FULL BODY HARNESS
MODEL NO. SB 1023



- A Dorsal D-Ring for Fall Arrest. 2 chest attachment D-Ring.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable shoulder and chest strap & thigh strap.
- Automatic stitching pattern with strength.
- Conforms to EN 361:2002

FULL BODY HARNESS

Special Purpose



Metro Introduces Special- Purpose Harnesses Designed For Use In The Most Challenging Environment.

EN 361: 2002

FULL BODY HARNESS MODEL NO. SB 1024

- 1 Dorsal and Sternal D-Ring for Fall Arrest. 1 ventral D-Ring at waist level for Rope Access & 2 lateral D-Ring for Work Positioning.
- Shoulder & leg Strap with dual color scheme for differentiation.
- 44 mm Polyester Webbing. Adjustable shoulder and chest strap & thigh strap.
- Automatic stitching pattern with soft padding on shoulder, waist & leg strap for an extended comfort.
- Conforms to EN 361:2002



FULL BODY HARNESS MODEL NO. SB 1051



- 2 Lateral D-Ring for work positioning 1 front ventral attachment (D-Ring) for Rope access.
- Adjustable thigh straps and waist belt.
- The waist belt are provided with a soft padding for possible comforts.
- Automatic stitching pattern with strength.
- Conforms to EN 358:2000

FULL BODY HARNESS MODEL NO. SB 1001

- Wide Comfort pad to provide lumbar support for long working hours.
- Fully Adjustable.
- 2 Lateral D-Ring for work positioning.
- Tool holding webbing loops.
- Conforms to EN 358:2000



FULL BODY HARNESS MODEL NO. SB 1002



- Optimum Comfort pad to provide lumbar support for long working hours.
- Fully Adjustable.
- 2 Lateral D-Ring for work positioning.
- Tool holding webbing loops.
- Conforms to EN 358:2000

How To Wear A Harness

the harness can be worn following these simple steps-



Features of *Metro* Full Body Harness

Id Plate: Dorsal Webbing Holding Cross Plate Maintains The D-Ring In Place Even After A Fall.

Automatic Buckles: Extremely easy to use with single-hand adjustment.

Stitching Pattern: Unique aesthetic stitch pattern for enhanced stitching strength with smart styling.

Thigh Straps: The distinctively placed fully padded straps with automatic buckles allows easy adjustment. The Knitted mesh net used in the pads maintains proper air circulation.

Shoulder Straps: Fully padded Shoulder straps with knitted mesh pads for better comfort and air circulation.

Metal Components: All hardware used are black powder coated to provide the highest degree of corrosion protection packed with high aesthetic appeal.

Work Positioning Belt: With knitted mesh pads for extra comfort. The belt is provided with holding loops for attaching tool bags etc.

Lateral D-Rings: Specially designed to stand out, enabling easy attachment to the work positioning lanyard.



MODEL NO. SB 1056

FULL BODY HARNESS

IS 3521 :1999



FULLBODY HARNESS: (CLASS A) MODEL NO. SB 1101

- Full Body Harness SB-1101 Confirming to IS 3521 - IS Marked. Class A
- Harnesses shall have one D- ring for fall arrest attachment affixed to both
- Shoulder straps at the back or at the front. Width and thickness of PP/Nylon
- Webbing shall be 40 mm and 3 mm respectively. Waist and leg strap are adjustable. Make Metro eco

FULLBODY HARNESS: (CLASS L) MODEL NO. SB 1105

- Full Body Harness SB-1105 Confirming to IS 3521 - IS Marked. Class L harnesses
- Shall have one D- ring on back side two D ring in the front side of the harness.
- Width and Thickness of PP/Nylon Webbing shall be 40 mm and 3 mm respectively.
- Waist and shoulder strap are adjustable. Make Metro eco.



FULLBODY HARNESS: (CLASS P) MODEL NO. SB 1106

- Full Body Harness SB-1106 Confirming to IS 3521 - IS Marked. Class P Harnesses
- Shall have Two D- rings mounted at waist level.
- Width and Thickness of PP/Nylon Webbing shall be 40 mm and 3 mm respectively.
- Shoulder, waist, leg straps are adjustable. Make Metro eco.



How To Wear A Harness

the harness can be worn following these simple steps-



EN 361:2002



**FULL BODY HARNESS
MODEL NO. SB 1121**

- A Dorsal D ring for Fall arrest.
- Shoulder & leg Strep with dual scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength.
- Conforms EN: 361-2002

**FULL BODY HARNESS
MODEL NO. SB 1122**



- A Dorsal D ring for Fall arrest. 2 chest attachment textile loops.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength.
- Conforms EN: 361- 2002

**FULL BODY HARNESS
MODEL NO. SB 1123**



- A Dorsal D ring for Fall arrest. 2 chest attachment D-Ring.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength.
- Conforms EN: 361-2002

**FULL BODY HARNESS
MODEL NO. SB 1124**



- A Dorsal D ring for Fall arrest. 1 Ventral D-Ring at chest level of rope Access & 2 lateral D-Rubg for work positioning.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength.
- Conforms EN: 361- 2002

**FULL BODY HARNESS
MODEL NO. SB 1141**



- A Dorsal D ring for Fall arrest.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap with work.
- Positioning belt with knitted mesh pads for extra comfort.
- Automatic stitching pattern with strength paid in west.
- Conforms EN: 361- 2002

FULL BODY HARNESS

Special Purpose



Metro Introduces Special- Purpose Harnesses Designed For Use In The Most Challenging Environment.

EN 361: 2002

FULL BODY HARNESS MODEL NO. SB 1142

- A Dorsal D ring for Fall arrest. 2 chest attachment textile loops.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength paid in west.
- Conforms EN: 361- 2002



FULL BODY HARNESS MODEL NO. SB 1143

- A Dorsal D ring for Fall arrest. 2 chest attachment D-Ring.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength paid in west.
- Conforms EN: 361- 2002



FULL BODY HARNESS MODEL NO. SB 1144

- A Dorsal D ring for Fall arrest. 1ventral D-Ring at chest level for rope Access & 2 lateral D-Ring for work positioning.
- Shoulder & leg Strep with dual color scheme for differentiation.
- 40 mm pp webbing. Adjustable shoulder and chest strep & thigh strap.
- Automatic stitching pattern with strength paid in west.
- Conforms EN: 361- 2002



How To Wear A Harness

the harness can be worn following these simple steps-





MODEL NO. 1110A

Material: Alloy Steel
Gate Opening : 19mm
Minimum Breaking Strength : 23 KN
Conformity : EN-362 : 2004



MODEL NO. 1110B

Material: Alloy Steel
Gate Opening : 18mm
Minimum Breaking Strength : 23 KN
Conformity : EN-362 : 2004



MODEL NO. 1110C

Material: Alloy Steel
Gate Opening : 15mm
Minimum Breaking Strength : 23 KN
Conformity : EN-362 : 2004



MODEL NO. 1110D

Material: Alloy Steel
Gate Opening : 18mm
Minimum Breaking Strength : 23 KN
Conformity : EN-362 : 2004



MODEL NO. 1110E

Material: Alloy Steel
Gate Opening : 50mm
Minimum Breaking Strength : 23 KN
Conformity : EN-362 : 2004


HOOKS & CONNECTORS

ENERGY ABSORBER



MODEL NO. EA2209

- The energy absorber opens up to an additional length of about 110cm, and hence the worker should always make sure that there is enough safe clear distance below his area work.
- A safe clear distance of 6m for a 2m Energy Absorbing Lanyard recommended.
- Conforms to EN355:2002

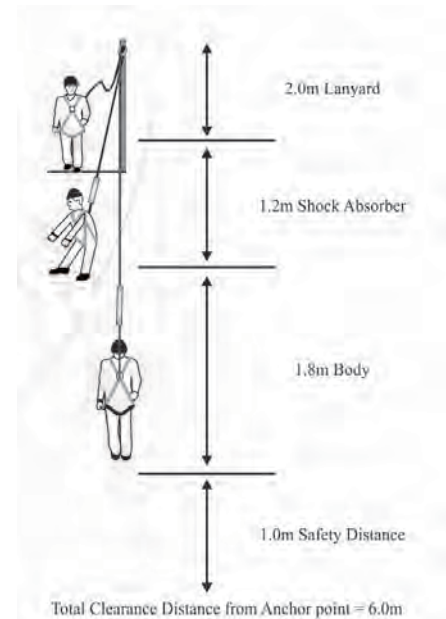

ROPE GRAB FALL ARRESTER



MODEL NO. FA2207(A)



MODEL NO. FA2207(B)









MODEL NO. FA2207(C)

- The rope grab and anchorage line is designed to prevent workers from falling during ascent or descent. It is particularly useful on sloping roofs where retractable lifelines may react too slowly.
- Rope grabs are designed for use within 14mm to 16mm Polymine synthetic rope lifeline with a minimum tensile strength of 28kN, secured to an anchorage independent of worker's platform.
- Available lifeline lengths are 10m, 20m 30m up to 100m.







WEBBING LANYARDS (44mm)

Polyester Rope : Width 44 mm, Length - 2.0 m and also available in length 1.0 m, 1.5 m & 1.8 m

MODEL NO.	ATTACHMENTS	LANYARDS
WRL101	Link Connecting Polyester Rope Lanyard, Both Side Loops	
WRL102	Link Connecting Polyester Rope Lanyard, One Side Loop Other Side Karabiner	
WRL103	Link Connecting Polyester Rope Lanyard, One Side Loop Other Side Snap Hook	
WRL104	Link Connecting Polyester Rope Lanyard, One Side Karabiner Other Side Snap Hook	
WRL105	Link Connecting Polyester Rope Lanyard, One Side Loop Other Side Scaffold Hook	
WRL106	Link Connecting Polyester Rope Lanyard, One Karabiner Other Side Scaffold Hook	

TWISTED ROPE LANYARDS

Three Strand Rope : Minimum Dia 12 mm, Length - 2.0 m and also available in length 1.0 m, 1.5 m & 1.8 m

MODEL NO.	ATTACHMENTS	LANYARDS
TRL101	Link Connecting Polypropylene Rope Lanyard, Both Side Loops	
TRL102	Link Connecting Polypropylene Rope Lanyard, One Side Loops Other Side Karabiner	
TRL103	Link Connecting Polypropylene Rope Lanyard, Both Side Karabiner	
TRL104	Link Connecting Polypropylene Rope Lanyard, One Side Loops Other Side Snap Hook	
TRL105	Link Connecting Polypropylene Rope Lanyard, One Side Karabiner Other Side Snap Hook	
TRL106	Link Connecting Polypropylene Rope Lanyard, One Side Loop Other Side Scaffold Hook	

LANYARDS & ANCHORAGES

Special Purpose



FORKED LANYARDS WITH ENERGY ABSORBER

Metro forked lanyards come in twisted ropes and also in 44mm Webbing and offer the facility to move in all directions while remaining Safely anchored at all times.



MODEL NO. FL301

- Material : Twisted Rope Lanyard(12mm)
- Available in lengths : 1.5m, 1.8m & 2.0m
- Attachment Elements : Karabiner with Energy Absorber and double scaffold Hook.



MODEL NO. WFL301

- Material: 44mm wide webbing.
- Available in lengths: 1.5m, 1.8m & 2.0m
- Attachment Elements: Karabiner with Energy Absorber and double scaffold Hook.

ANCHORAGE WEBBING SLINGS

Metro provides a wide range of anchorage webbing slings of various configurations and length that can be altered as per the requirement.



MODEL NO. WS901

- Material : 44mm wide webbing.
- Available in lengths : 1.5m, 1.8m & 2.0m
- Attachment Elements: One side Karabiner other side D-Ring



MODEL NO. WS902

- Material : 44mm wide webbing.
- Available in lengths : 1.5m, 1.8m & 2.0m
- Attachment Elements : Both side Loop



MODEL NO. WS903

- Material : 44mm wide webbing.
- Available in lengths : 1.5m, 1.8m & 2.0m
- Attachment Elements: Both side D-Ring



MODEL NO. WS904

- Material : 44mm wide webbing.
- Available in lengths : 1.5m, 1.8m & 2.0m
- Attachment Elements: One side Loop other side D-Ring

WORK POSITIONING ROPE LANYARD

Metro Has A Customized Work Positioning Lanyard. This Lanyard Can Be Connected To The Lateral D-ring On The Work Positioning Belt or Combination Harness And Easily Adjusted For Their Length To Suit The Application.

- Work Positioning Lanyard With Grip Adjuster Made Of
- 14mm Polyamide 3-strand Twisted Rope
- Has A Convenient Rope Grab Adjuster For Easy Length Adjustment
- Easy To Connect Connectors
- As Per En358:2000



MODEL NO. WPRL-01

ANCHORAGE LINE

- Anchorage Line (To Be Used With Fall Arrester)
- 14mm,16mm Dia Polyamide Rope One Side Loop Other Side Snap Hook

MODEL NO.	ROPE LENGTH
AL-10	10 Mtr
AL-20	20 Mtr
AL-30	30 Mtr
AL-50	50 Mtr
AL-100	100 Mtr

- Longer Length Also Available.



RETRACTABLE BLOCK

- Retractable Fall Arrest Block Built-in Galvanized Steel Swivel Eye
- 3/20"(4mm) Galvanized Steel Cable Has A Tensile Strength Of 3080lbs(14kn), Length:10m
- P.p. Housing And Drum, Durable & Lightweight And Resistant To Corrosion
- Weight: 10.6lbs (4.83kgs)
- Meets The Requirements En 360



MODEL NO. RBFA-02

WINDOW CLEANING KIT



Model No.	Description
SB-1056	Full Body Harness
AL-50	Anchorage Line 100 Mts. Long Polyamide Rope With One Side Snap Hook & Other Side End Stop Knot
FA-2207 A	Rope Grap Fall Arrester With Karabiner
KRL-50	Anchorage Line 50 Mts. Long Karamental Semi Static Rope With One Side Snap Hook & Other Side End Stop Knot
WPRL-01	Work Positioning Lanyard With Automatic Grip Adjuster
WS-901	Sling
CT-01	Cow Tails(0.5m)
CK-01	Cutter Knife



← Adjustable chin Strat

← Comfort Chin Pad


WE...

Mede entry into the manufacture of safety gadgets arena in the year 1999.

Metro Moulding Industries (MMI) today has emerged as the global leaders in its area of operation.

Imbued with the mission to provide world class headgears (Helmets), MMI under the Brand name METRO brings you a wide range of Helmets in alluring colours to choose from that defy the toughest work conditions, keeping you fully secure and totally safe, wherever you are—MINES, INDUSYTRY, FURNACE, TUNNEL, CRICKET FIELD or even on a RIDE...


The IS: 2925-1984 Metro Helmets are manufactured in strong conformity to MMI's unwavering principle of TQM (Total Quality Management). Right from the procurement of raw material to its final outcome, every stage of the manufacturing process undergoes stringent quality checks for churning out the most reliable helmet which never compromises on safety.

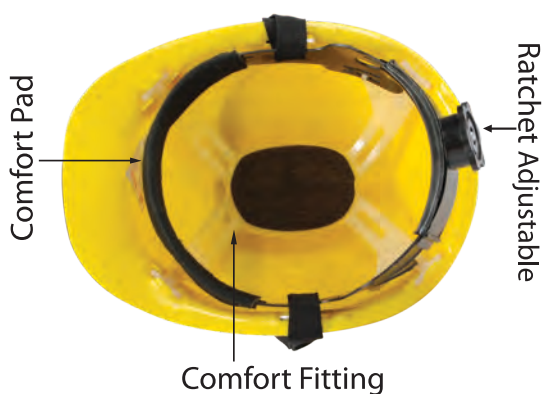

Comfort Pad

Ratchet Adjustable

Comfort Fitting

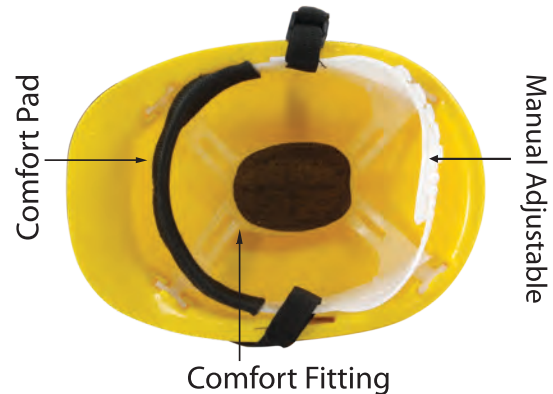

Comfort Pad

Manual Adjustable

Comfort Fitting



SAFETY HELMET WITH RACHET ADJUSTMENT
H.D.P.E. IS : 2925
MODEL NO.: SH-1201



SAFETY HELMET WITH MANUAL ADJUSTMENT
H.D.P.E. IS : 2925
MODEL NO.: SH-1202



CHIN-STRAP MINE SAFETY HELMET
H.D.P.E. IS : 2925
MODEL NO. : SH-1203



NAPE STRAP MINE SAFETY HELMET
H.D.P.E. IS : 2925
MODEL NO. : SH-1204



NAPE STRAP MINE SAFETY HELMET
H.D.P.E. IS : 2925
MODEL NO. : SH-1204-A



CHIN-STRAP MINE SAFETY HELMET
FIBRE GLASS IS : 2925
MODEL NO. : SH-1205



LOAD CARRYING HELMET
H.D.P.E.
MODEL NO. : SH-1206



WITH LIGHT HELMET
MODEL NO. : SH-1207



ARMY SAFETY HELMET
FIBRE GLASS
MODEL NO. : AH-1208



FIRE HELMET
FIBRE GLASS
MODEL NO. : FH-1209



CRICKET HELMET
MODEL NO.: CH-1210



Poly carbonate Shield & Lathi
Model No. 1211



We Can Provide Specific Colouer Also



MINI MAX JACKETS, MODEL NO. SJ-1401



Metro's Florescent Reflective Jacket EN-471 CE Approved with white & gray reflective tape. Three side open and Velcro for adjustment. 2 inch wide Reflective Tape. Fabric Color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric and fabric 90 Gsm. cloth

SAFETY JACKETS, MODEL NO. SJ-1402



Nice Florescent Reflective Jacket with white reflective Tape. Tape size: - 1 inch & 2 Inch. Fabric Color available: - Orange, Green, Yellow. Available in Mash fabric and fabric 50 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1403 Metro Eco



Florescent Reflective Jacket with white reflective Tape .Tape size: - 1 inch & 2 Inch. Fabric Color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric and fabric 60 Gsm. cloth.

CROSS BELT, MODEL NO. SJ-1404



Florescent Reflective Jacket with white reflective Tape .Tape size: - 2 Inch. Fabric Color available: - Orange, Green, Yellow, red, blue. Available in Mash fabric and fabric 60 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1405



Metro's Florescent Reflective Mesh Jacket EN-471 CE Approved with White & gray reflective Tape. Reflective Tape 2 Inch. Fabric color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric and fabric 90 Gsm. cloth.

POLICE JACKETS, MODEL NO. SJ-1406



Metro's Florescent Reflective Jacket EN-471 CE Approved gray Color reflective Tape with chain. Reflective Tape 1 Inch 2 tape in each side H shape front and back side and zipper for fastening . Fabric color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric and fabric 90 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1407



Metro's Florescent Reflective Mesh Jacket EN-471 CE Approved. 2" Gray reflective Tape with contrasted color fabric patti and zipper for fastening. Reflective Tape 2 Inch. Fabric color available: - Orange, Green, Yellow, red, blue. Available in Mash fabric and fabric 90 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1408



Metro's Florescent Reflective Jacket EN-471 CE Approved gray Color reflective Tape with chain. Reflective Tape 1 Inch with contrasted dual color fabric patti tape in each side. H shape front and back side and zipper for fastening. Fabric color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric and fabric 90 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1409



Metro's Florescent Reflective Jacket EN-471 CE Approved with white & gray reflective tape. Three side open and Velcro for adjustment. 2 inch wide Reflective Tape. Fabric Color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric 125 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1410



Metro's Florescent Reflective Mesh Jacket EN-471 CE Approved with gray reflective Tape 2 Inch in front left side two pocket one have flap and other open one ring for whistle and two flap pocket on lower part of jacket and zipper for fastening. Fabric color available: - Orange, Green, Yellow, Red, Blue. Available in Mash fabric 125 Gsm. cloth.



SAFETY JACKETS, MODEL NO. SJ-1411



Metro's Florescent Reflective Jacket EN-471 CE Approved with gray reflective Tape 2 Inch. This fabric has 35% cotton and 65% polyester for comfort wearing Fabric color available. : - Orange, Green.
Available in fabric 200 Gsm. cloth
Both options available for fastening zipper or Velcro.

SAFETY JACKETS, MODEL NO. SJ-1412



Metro's Florescent Reflective Jacket EN-471 CE Approved with gray reflective Tape 2 Inch tape size two horizontal and two vertical. This fabric has 35% cotton and 65% polyester for comfort wearing Fabric color available. : - Orange, Green.
Available in fabric 200 Gsm. cloth
Both options available for fastening zipper or Velcro.

SAFETY JACKETS, MODEL NO. SJ-1413



Metro's Florescent Reflective Jacket EN-471 CE Approved with gray reflective Tape 2 Inch tape size two horizontal and two vertical and two packets on front side of jacket.
Fabric color available. : - Orange, Green.
90 Gsm. fabric cloth
Both options available for fastening zipper or Velcro.

SAFETY JACKETS, MODEL NO. SJ-1414



Metro's Florescent Reflective cross belt Jacket EN-471 CE Approved with Gray reflective Tape .Reflective Tape 2 Inch. Fabric color available: - Orange, Green.
Available in MESH fabric 125 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1415



Metro's Florescent Reflective Jacket EN-471 CE Approved gray Color reflective Tape with chain. Reflective Tape 1 Inch 2 tape in each side H shape front and back side and zipper for fastening.
Fabric color available: - Orange, Green, Yellow, red, blue.
Available in Mash fabric 125 Gsm. cloth.

SAFETY JACKETS, MODEL NO. SJ-1416



Metro's Florescent Reflective cross belt Jacket EN-471 CE Approved with Gray reflective Tape .Reflective Tape 2 Inch. Fabric color available: - Orange, Green,
Available in fabric 200 Gsm. cloth.

DANGRI, MODEL NO. SJ-1417



Our **Dangri** (over all) are available in various knitted fabric and colours. These are manufactured using quality fabric, raw material and thread thus make high quality dangri to match user needs. Dangri are manufactured as per client / customer requirements and specifications.

DANGRI, MODEL NO. SJ-1418



Our **Dangri** With white Reflective Tape (over all) are available in various knitted fabric and colours. These are manufactured using quality fabric, raw material and thread thus make high quality dangri to match user needs. Dangri are manufactured as per client / customer requirements and specifications.

ROAD SAFETY CONES, MODEL NO.1501



TRAFFIC CONE LIGHT BASE
Made up of LDPE using UV stabilized colors
Height - 500mm & 750mm
Weight - 480g & 1.25 Kgs
Reflective Sleeve - 4"
Colour - Red
Applications: Lane dividing, Road diversion, Parking areas, Men at work zone

ROAD SAFETY CONES, MODEL NO.1502



TRAFFIC CONE Heavy BASE
Made up of LDPE using UV stabilized colors
Height - 750mm
Weight - 3.30 Kgs appx.
Base Size: 385X385mm
Reflective Sleeve - 4"
Colour - Red
Applications: Lane dividing, Road diversion, Parking areas, Men at work zone

ROAD SAFETY CONES, MODEL NO.1503



Applications: Lane dividing, Road diversion, Parking areas, Men at work zone
TRAFFIC CONE Heavy BASE Made up of LDPE using UV stabilized colors
 Height - 750mm
 Weight - 4.26 Kgs appx.
 Base Size: 385X385mm
 Reflective Sleeve - 4"
 Colour - Orange

ROTO CONES, MODEL NO.1504



Applications: Lane dividing, Road diversion, Parking areas, Men at work zone This traffic cone comes with a rubber base fitted at the bottom of the cone, to make the cone heavier so that it withstands heavy vehicular movement and heavy wind
TRAFFIC CONE WITH RUBBER BASE
 Made up of LDPE using UV stabilized colors
 Height - 750mm, 1000mm
 Weight - 2 & 5 Kgs appx.
 Reflective Sleeve - 4"
 Colour - Red

TRAFFIC CONE CHAIN, MODEL NO. 1505



TRAFFIC CONE CHAIN
 Red and White color linking cone chain
 Packing- 10mtr.

SPRING POST MODEL NO.1506/07



Spring Post has two or three reflective tape bands
 Made Up Of : Poly-Urethane High flexibility, High performance, High impact resistance, Tensile strength, UV stabilized, Reflective tape for day-night highly visibility
 Height : 750mm, 700mm, 600mm, 450mm

CAUTION WET FLOOR, MODEL NO. WF-1508



Lightweight and versatile; makes a heavy statement about safety Two-sided, 25" (63.5 cm) model for use in narrow areas. Folding design for convenient storage or transport on the MRI Custodial Cart.

DELINEATORS, MODEL NO. RD-1509




- (1) Height = 2.5 Fit, Dia = 2.5 Inch
- (2) Height = 2 Fit, Dia = 2 Inch
- (3) Height = 3 Fit, Dia = 3 Inch
- (4) Height = 2.5 Fit, Dia = 2 Inch
- (5) Size = 75 x 80 mm

BARRIERS,MODEL NO. RB-1510




Size: 1000 X 200 X 500mm
 Water Ballast : 15 Ltr

BARRIERS,MODEL NO. RB-1511



Size: 1150X 600 X 500mm
 Water Ballast : 22 Ltr

BARRIERS,MODEL NO. RB-1512

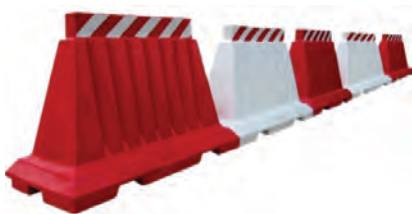

Size: 1650 X 1000 X 600mm
 Water Ballast : 65 Ltr

FANCING NET, MODEL NO. FN-1513



Size: 1mtr X 50mtr
 Color : Orange
 Material: PVC

PARKING STOPPER, MODEL NO. PS-1514



Parking Stopper
Size:- 500 X 160 X 125

CORNER GUARD, MODEL NO. CG-1515



Pre-Coloured Material, do not require Repainting
Instant Installation with application of Epoxy and Spikes for Anchoring
Comes with a standard Skid Resistant Base
UV, Moisture and Temperature Resistant
Available in Black and yellow combination for Greater Visibility
Block Size : 900x100 mm & 500X100 mm

BARRIERS, MODEL NO. 16



Size:- 1000 X 800 X 400

BARRIERS, MODEL NO. 17



Size:- 1500 X 400 X 950

WOODEN LADDER , MODEL NO. WL-1801



SAFETY WOODEN LADDER
Safety Ladder (Wooden)
Pillar Size 18"
Dia : 32 MM
Rope Dia : 12MM & Various rope
Dia Ex.A- 12MM,
B-14MM, C- 16MM, D-18MM,
E-20MM, F-22MM, G-24MM. etc.

ALUMINUM LADDER , MODEL NO. AL-1802



ALUMINUM LADDER
(Aluminum)
Pillar Size 18"
Dia : 24 MM
Rope Dia : 12MM .

PLASTIC SPEED BUMPS , MODEL NO. SB-1901




Plastic Speed Bumps
Length : 250 mm
Width : 350 mm
Height : 50 mm
Reflector Type: PMMA reflectors

PLASTIC SPEED BUMPS , MODEL NO. SB-1902



Plastic Speed Bumps
Length : 500 mm
Width : 400 mm
Height : 75 mm

RUBBER SPEED BUMPS , MODEL NO. SB-1903



Rubber Speed Bumps
Length : 410 mm
Width : 500 mm
Height : 50 mm

RUBBER SPEED BUMPS , MODEL NO. SB-1904



Rubber Speed Bumps
Length : 410 mm
Width : 500 mm
Height : 75 mm

DOOR FRAME METAL DETECTOR, MODEL NO. DFMD-2003



- DOOR FRAME METAL DETECTOR
- Automatic zero adjustment
 - Quick installation – no training required
 - Ignores external metals
 - 10 levels of sensitivity
 - 10 step bar-graph indicator
 - Intelligent counter for traffic entry, exit & algebraic sum
 - Piezoelectric beeper for indication of metal
 - Walk and Stop indicators to regulate traffic
 - Detects all metals, alloys and ferrites
 - Low field strength - no effect on pacemakers & magnetic media
 - SMPS power supply for use with 90V to 270V
 - Built in full-function battery backup for over 12 hours

DOOR FRAME METAL DETECTOR, MODEL NO. DFMD-2004



Construction installation:- Laminated sun mica pasted plywood frame indoor.
Overall Dimensions (approx) mm:- 605x920x2180
Passage clearances (Approx) mm:- 605x810x2010
Approx Weight:- 60 Kg., Controls:- Built in Frame
Walk-Stop indicator:- Built in frame
Detection sensitivity:- Detects both ferrous, non ferrous metals and also the metals concealed in ferrite with uniform sensitivity.
Detection:- Level 9 levels to select the Low/Medium/High
Power: 230 VAC +15% 50Hz, 50V & also 2 nos. and Battery Back-up
Alarm:- One Tone/Three tone (optional) audible alarm signal and visual alarm by bar graph & meter (optional)
Optional:- Intelligent people counter for entry, exit and algebraic sum.



HAND HELD METAL DETECTORS MODEL NO.HHMD-2002



We bring forth Hand Held Metal Detector, which is known for its optimum quality. Manufactured using high-grade material, the Hand Held Metal Detectors is highly appreciated by our clients.

LIFE JACKET, MODEL NO. LJ-2102



Life Jacket
It has the following features:
Foamed polyethylene
Additional whistle and light can be provided as per clients requirement

LIFE BUOY, MODEL NO. LB-2104



Lifebuoys
Shell- Polythene Plastics
Buoyancy Material- Polyurethane
for rigid cellular plastics .with RR Tapes

EAR PLUG, MODEL NO. EP2210



METRO Ear Plugs are the ideal choice for protection of the organ of hearing in areas of continuous exposure to high levels of sound, and also ideal in hot and humid conditions. Choose from a comprehensive range of Ear Plugs Make P.U Material and provide the highest level of comfort to the user, along with giving the optimum attenuation to harmful levels of Sound.

SEARCH LIGHT, MODEL NO. SL-2213



160mm dia x 250 mm length fitted with specially designed deep parabola reflector having 50/55 watt, 12 volts halogen lamp, 12 volts & 7AH rechargeable maintenance free battery. Micro controller based HHSL Suitable for 55W Halogen Lamp Operating range of about 1000mt (i.e. 1km) Beam distance of 350 mt. (minimum) so as to detect group of persons. Shock resistance front glass. SMPS inbuilt charger working on from 90v to 270v. Membrane switches (Gold plated tracks with minimum life of 1 million operations) back lit with distinct color LED.

UNDER VEHICLE SEARCH MIRROR, MODEL NO. UVSM-2214



We have specialized ourselves in the production of wide array of Under Vehicle Search Mirror as per the international quality standards. These are developed under the utmost care of professionals to guarantee compact design, trouble-free operation and low maintenance. These are fitted with flat Mirror of 2 Ft X 1Ft Fixed on the Flat platform mounted on caster wheels.

METRO Q-MANAGER, MODEL NO. MQM- 2215



Metro Q-Manager are freestanding or floor-fixed stainless steel stanchions with various 2.5m tapes and fitting options. A 320 degree rotating tape head is also available to allow for constantly changing queuing configurations.

Dimensions:
Stanchion height; 1000 mm
Post diameter; 63 mm
Base diameter; 320 mm
Tape length; 2.5 meter
Weight; 9.800 kg

PARKING POLE, MODEL NO. PP-2216



Parking Pole:
4 way Ring to make it easy to hang hook ends Red Valvet Rope

Height : 1000mm
Post diameter: 63 mm
Base diameter: 320 mm



SOLOR ROAD STUD, MODEL NO.SRT-2301



SOLAR ROAD STUD
Material: Aluminum alloy shell and clear PC cover
Size: 132x122x75mm (include the back metal handle)
Battery: 1.2V 1400Ma rechargeable Ni-Cd battery
Solar panel: 0.4W
Light sources: 6pcs super bright LEDs

PLASTAIC ROAD STUD, MODEL NO. PRS-2302



Plastic road stud: Single reflect, double reflect
Size: 100x100x20mm.
Weight: 180g,

ALUMINIUM ROAD STUD, MODEL NO. ARS-2303



Alcolite Aluminum Road Stud With Bids
Dimension: 100 x 100 x 20 mm
Direction : Two way Reflective
Reflector : Glass Bids 21 Each Side
Length Anchoring Shank : 50 mm
Length of Shank at the Top of Stud : 70 mm
Material : Aluminum Alloy Body
Color : Yellow, white, Red

TRAFFIC LIGHT BATON, MODEL NO.BT-2304



Traffic Light Baton
 In this scenario our road safety and enforcement gadgets come as a boon to traffic control authorities. Our PVC Traffic Safety Cones and Traffic Control LED Light Batons are precision made to combat all traffic hazards.

ROAD SIGNS TRIANGLE, MODEL NO. RST-2305



All vehicles exceeding 4.5 tonne or transporting a Placard Load of Dangerous Goods, must be fitted with breakdown triangles. The Emergency Warning Triangle has red reflectors for both easy day and night visibility. The base is weighed for stability in high winds. Each kit contains three triangles in a plastic carrying case.

CONVEX MIRROR, MODEL NO. CM-2306



130 degree of viewing angle for internal and external purposes Made up of Polycarbonate reflective mirrors. Body is made of ABS, Fibre, Plastic Outdoor use with hood Complete with Mounting Hardware
Size: 100 cms, 80 cms, 60 cms, 45 cms.

REFLECTIVE TAPE, MODEL NO. RT-2501

Color Available:- White, Yellow, Blue, Red.



CAUTION TAPE, MODEL NO. CT-2502

Color -White
Text- Red



Made From Fully Automatic Machine & Imported Moulds

Safety Shoes **Maxo**

Sole:- PVC
Upper:- Rexin, with Steel Toe
Size:- 6 to 10
Packing 24 Pair/Box



Model No. SS 1607

Safety Gumboot **Tuff 11"**

PVC Gumboot, without Steel Toe
Size:- 6 to 10
Packing 30 Pair/Box



Model No. GB 1608

Safety Gumboot **Black Stone 10"** IS 12254: 1993

Double Density and Double Color Gumboots
Providing Highest Level of Safety & Comfort
Puncture and Tear Resistant.
Various Chemicals and Oil/ Acid Resistant,
Water Proof, Anti-Static, Anti-Slip.
Inside Lining-Fabric.
Packing 24 Pair/Box



Model No. GB 1609

Experts in Double Density Double Color Technology



Made From Fully Automatic Machine & Imported Moulds

Safety Gumboot **Spectrum 13"** IS 12254: 1993

Double Density and Double Color Gumboots
Providing Highest Level of Safety & Comfort
Puncture and Tear Resistant
Various Chemicals And Oil/ Acid Resistant,
Water Proof, Anti-static, Anti-slip
Steel Toe Cap as per ISI Standards
Providing Maximum Safety
Inside Lining-fabric. Packing 12 Per/Box



Model No. GB 1610

Safety Gumboot **Step Up 15"** IS 12254: 1993

Double Density and Double Color Gumboots
Providing Highest Level of Safety & Comfort
Puncture and Tear Resistant
Various Chemicals And Oil/ Acid Resistant,
Water Proof, Anti-Static, Anti-Slip
Steel Toe Cap as per ISI Standards
Providing Maximum Safety Inside Lining-Fabric.
Packing 12 Pair/Box



Model No. GB 1611

Safety Shoes **Maxo Plus**

Product Details:-
Upper:- Synthetic Leather
Sole:- PVC Injected
Size:- 6 to 10
Steel Toe Fitted
Packing 24 Pair/Box



Model No. 1612



Made From Fully Automatic Machine & Imported Moulds

Safety Shoes **Polo**

Product Details:-

Upper:- Synthetic Leather

Sole:- PVC Injected

Size:- 6 to 10

Steel Toe Fitted

Packing 20 Pair/Box



Model No. SS 1613

Safety Shoes **Dzire**

Product Details:-

Upper :- Synthetic Leather

Sole :- PVC Injected

Size :- 6 to 10

Steel Toe Fitted

Packing 20 Pair/Box



Model No. SS 1614

METRO has been operating nationwide in providing the best Fall Arrest Safety Net solutions in the construction industry, to enable the worker to work safely and effectively at heights.

The Fall Arrest Safety Nets by **METRO** prevent fatalities and serious accidents when working at height by providing a collective level of protection.

The fundamental principle governing the design and performance of **METRO** safety nets are as follows-

- 1). Made from high strength polypropylene and able to withstand the required load.
- 2). Special Knotting of the meshes work towards effective Shock Absorption, hence minimizing any impact related injury on to the worker.

METRO Fall Arrest Safety Nets are available in various sizes, as required. Some of the standard sizes are available as below-

Safety Net Size	Mesh Size	Mesh Rope	Additional
10m x 3m	25mm	2 mm Double Cord	-
10m x 3m	100mm	4mm	-
10m x 3m	100mm	4mm	With Overlay Net
10m x 5m	25mm	2mm Double Cord	-
10m x 5m	100mm	4 mm	-
10m x 5m	100mm	4 mm	With Overlay Net
6m x 4m	25mm	2 mm Double Cord	-
6m x 4m	100mm	4 mm	-
6m x 4m	100mm	4 mm	With Overlay Net

● SAFETY NET-YELLOW



MODEL NO. 1701

● SAFETY NET-BRADED



MODEL NO. 1702

● SAFETY NET-OVER LAY




MODEL NO. 1703

● SAFETY NET-BOTANICAL



MODEL NO. 1704

● SAFETY NET-DUBBLE CORD

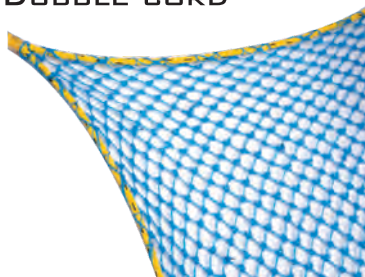

MODEL NO. 1705

● SAFETY NET-CARGO NET



MODEL NO. 1706



Metro[®]

LOOKING FOR SAFETY

METRO MOULDING INDUSTRIES

Authorised Dealer / Distributor

DESIGNO # 9810084582