


KARGOLIFT™

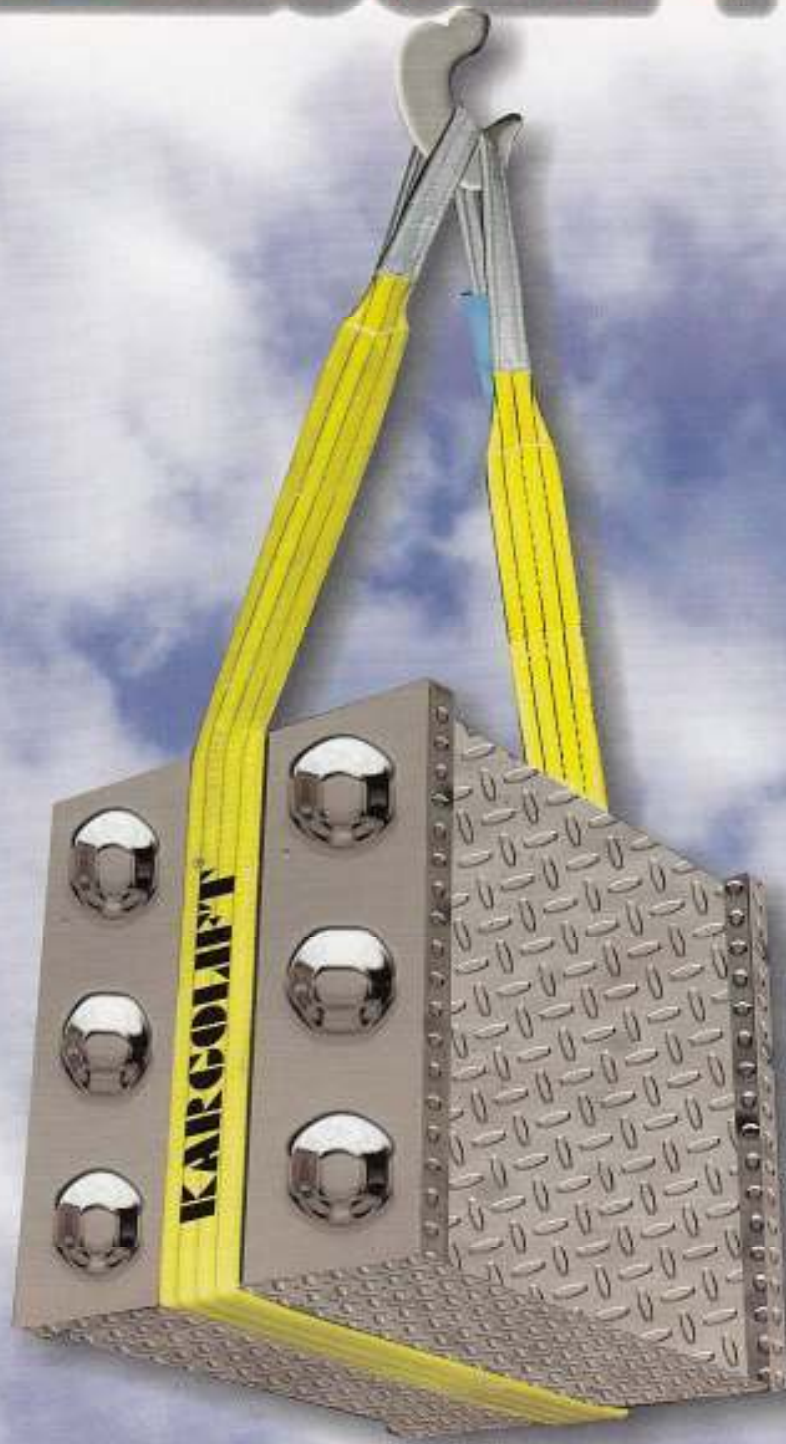

A brand owned by:

UVIRAJ GLOBAL PRIVATE LIMITED

POLYESTER WEBBING SLINGS

Code	Width		Colour	WLL (Working Load Limit in Ton)				
				Straight Lift	Choked Lift	Basket Lift	Basket 45° Lift	Basket 90° Lift
CODE	INCH	MM	SHADE	M=WLL X 1.0	M=WLL X 0.8	M=WLL X 2.0	M=WLL X 1.4	M=WLL X 1.0
KL/2P/1T	1	25	VIOLET	1.0	0.8	2.0	1.4	1.0
KL/2P/2T	2	50	GREEN	2.0	1.6	4.0	2.8	2.0
KL/2P/3T	3	75	YELLOW	3.0	2.4	6.0	4.2	3.0
KL/2P/4T	5	100	GREY	4.0	3.2	8.0	5.6	4.0
KL/2P/5T	5	125	RED	5.0	4.0	10.0	7.0	5.0
KL/2P/6T	6	150	BROWN	6.0	4.8	12.0	8.4	6.0
KL/2P/8T	8	200	BLUE	8.0	6.4	16.0	11.2	8.0
KL/2P/10T	10	250	ORANGE	10.0	8.0	20.0	14.0	10.0
KL/2P/12T	12	300	ORANGE	12.0	9.6	24.0	16.8	12.0
KL/4P/16T	8	200	BLUE	16.0	12.8	32.0	22.4	16.0
KL/4P/20T	10	250	ORANGE	20.0	16.0	40.0	28.0	20.0
KL/4P/24T	12	300	ORANGE	24.0	19.2	48.0	33.6	24.0

M = Mode factor for symmetrical loading

- Made from high tenacity polyester
- Light weight
- Low stretch
- Colour Coded as per WLL (refer to the table)
- Strong resistance to chemicals
- Prevents slippage
- Easy to transport
- Easy storage
- Available in various lengths
- Attractive packaging
- Certificate provided with each sling
- Anti-abrasive sleeve provided

FLAT WEBBING SLINGS ↓



- Made from high tenacity polyester
- Versatile
- Economical

FLAT ENDLESS WEBBING ↓



- Made from high tenacity polyester
- Economical
- Versatile



POLYESTER ROUND SLINGS

POLYESTER ROUND ENDLESS SLINGS AS PER EN 1492-2							
Code	Diameter	Colour	WLL (Working Load Limit in Ton)				
			Straight Lift	Choked Lift	Basket 200%	Basket 140%	Basket 100%
CODE	MM	SHADE	M=WLL X 1.0	M=WLL X 0.8	M=WLL X 2.0	M=WLL X 1.4	M=WLL X 1.0
KL/RES/1T	18	VIOLET	1.0	0.8	2.0	1.4	1.8
KL/RES/2T	20	GREEN	2.0	1.6	4.0	2.8	3.6
KL/RES/3T	22	YELLOW	3.0	2.4	6.0	4.2	5.4
KL/RES/4T	25	GREY	4.0	3.2	8.0	5.6	7.2
KL/RES/5T	27	RED	5.0	4.0	10.0	7.0	9.0
KL/RES/6T	32	BROWN	6.0	4.8	12.0	8.4	10.8
KL/RES/8T	38	BLUE	8.0	6.4	16.0	11.2	14.4
KL/RES/10T	45	ORANGE	10.0	8.0	20.0	14.0	18.0
KL/RES/12T	60	ORANGE	12.0	9.6	24.0	16.0	21.6
KL/RES/15T	70	ORANGE	15.0	12.0	30.0	21.0	27.0
KL/RES/20T	80	ORANGE	20.0	16.0	40.0	28.0	36.0
KL/RES/25T	90	ORANGE	25.0	20.0	50.0	35.0	45.0
KL/RES/30T	100	ORANGE	30.0	24.0	60.0	42.0	54.0
KL/RES/36T	115	ORANGE	36.0	28.8	72.0	50.0	64.8
KL/RES/40T	125	ORANGE	40.0	32.0	80.0	56.0	72.0
KL/RES/50T	180	ORANGE	50.0	40.0	100.0	70.0	90.0
KL/RES/75T	200	ORANGE	75.0	60.0	150.0	105.0	135.0
KL/RES/100T	250	ORANGE	100.0	80.0	200.0	140.0	180.0

M = Mode factor for symmetrical loading

- Made from high tenacity polyester • Strong • Durable • Low stretch
- Colour coded as per WLL (refer to the table) • Light weight • Strong resistance to chemicals
- Easy to transport • Easy storage • Available in various lengths • Excellent Abrasion Resistance

BAG SLING



- Ideal for lifting products that require wider support • Minimum slippage
- Available in lengths as per requirement

KARGOLIFT™

RATCHET LASHING



- Ideal for securing loads on pallets, vehicles, ships and aircrafts
- Restraints load using a tensioning device (ratchet)
- High efficiency
- Saves time
- Available in two configurations – Two-part and Endless
- Available in any length as per the requirement

RATCHET BUCKLES AND J-HOOKS



UVIRAJ GLOBAL PRIVATE LIMITED

S-17-18, PANKI INDUSTRIAL AREA, SITE-IV, KANPUR-208022 (U.P.), INDIA

PH: +91-512-2690031, 2690032

FAX: +91-512-2690033

E-MAIL: enquiry@uvirajglobal.com URL: www.uvirajglobal.com